sapcon®

MBR10120CL

Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Refractory metal capable of high temperature operation metal. The proprietary barrier technology allows for reliable operation up to 175 junction temperature. Typical application are in switching Mode Power Supplies such as adaptors, DC/DC converters, free-wheeling and polarity protection diodes.

Features

- * Low Forward Voltage.
- * Low Switching noise.
- * High Current Capacity
- * Guarantee Reverse Avalanche.
- * Guard-Ring for Stress Protection.
- * Low Power Loss & High efficiency.
- * 175 Operating Junction Temperature
- * Low Stored Charge Majority Carrier Conduction.
- * Plastic Material used Carries Underwriters Laboratory

Flammability Classification 94V-O



* In compliance with EU RoHs 2002/95/EC directives

MAXIMUM RATINGS


Characteristic	Symbol	MBR10120CL	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	120	V
RMS Reverse Voltage	V _{R(RMS)}	84	V
Average Rectifier Forward Current (per diode) Total Device (Rated V_R), T_C =125	I _{F(AV)}	5 10	Α
Peak Repetitive Forward Current (Rate V _R , Square Wave, 20kHz)	I _{FM}	20	Α
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfware, single phase, 60Hz)	I _{FSM}	150	А
Operating and Storage Junction Temperature Range	T _J , T _{stg}	-65 to +150	

THERMAL RESISTANCES

Typical Thermal Resistance junction to case (per device)	$R_{\theta j\text{-}c}$	3.4	/w	
--	-------------------------	-----	----	--

ELECTRIAL CHARACTERISTICS

Characteristic	Symbol	Min.	Тур.	Max.	Unit
Maximum Instantaneous Forward Voltage (per diode)					
$(I_F = 0.1 \text{ Amp } T_C = 25)$			0.31	0.35	V
$(I_F = 2.5 \text{ Amp } T_C = 25)$			0.62	0.72	v
$(I_{F} = 5.0 \text{ Amp } T_{C} = 25)$			0.80	0.85	
Maximum Instantaneous Reverse Current					
(Rated DC Voltage, $T_c = 25$)	I _R		0.08	0.1	mA
(Rated DC Voltage, $T_c = 125$)			15	30	



SCHOTTKY BARRIER


RECTIFIERS


10 AMPERES

120 VOLTS


sapcon®

MBR10120CL

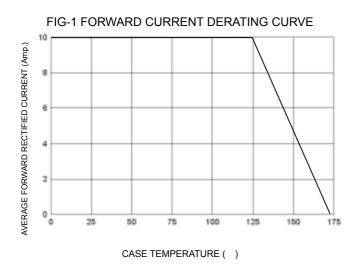


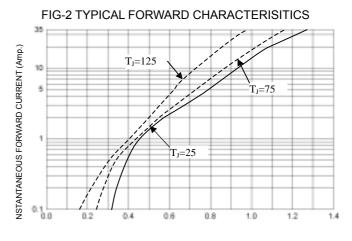


FORWARD VOLTAGE (Volts)

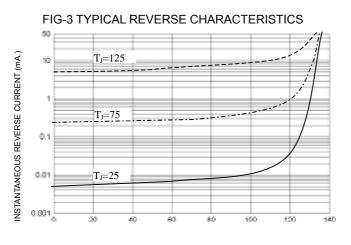

REVERSE VOLTAGE (Volts)

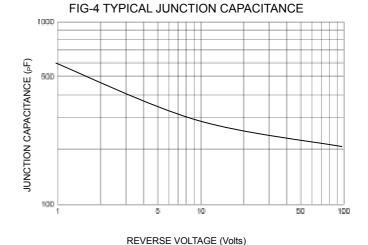

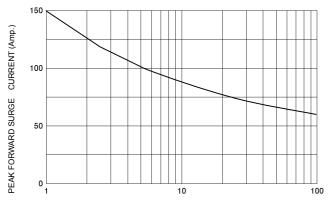

NUMBER OF CYCLES AT 60 Hz

FIG-5 PEAK FORWARD SURGE CURRENT