


GP 系列 SERIES


- 5000h at 105°C
- high-reliability and professional applications
- RoHS Compliant

◆ SPECIFICATION

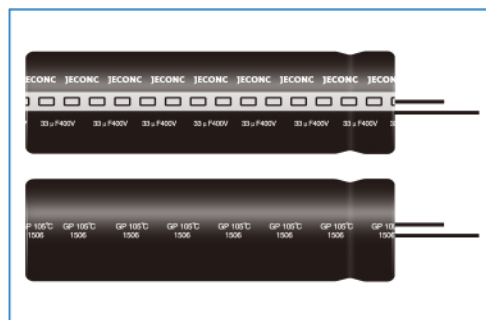

Items	Characteristics																							
Operating Temperature Range(℃)	-25~+105℃																							
Voltage range (V)	200~450v																							
Capacitance Range (μF)	27~220 μF																							
Capacitance Tolerance	±20% (at20℃, 120Hz)																							
leakage current (μA)	After 5 minute at 20℃ application of rated voltage , leakage current is not more than: $I\leq 0.02CV+25\mu A$ C:Nominal Capacitance (μF) V:Rated Voltage (V)																							
Dissipation Factor(Tan δ)	<table><tr><td>WV(V)</td><td>200</td><td>250</td><td>400</td><td>420</td><td>450</td></tr><tr><td>Tan δ (max)</td><td>0.15</td><td>0.15</td><td>0.2</td><td>0.2</td><td>0.2</td></tr></table> (at 20℃, 120Hz)						WV(V)	200	250	400	420	450	Tan δ (max)	0.15	0.15	0.2	0.2	0.2						
WV(V)	200	250	400	420	450																			
Tan δ (max)	0.15	0.15	0.2	0.2	0.2																			
LowTemperature Characteristics	<table><tr><td>Rated Voltage (V)</td><td colspan="2">200~250</td><td colspan="3">400~450</td></tr><tr><td>Z-25℃/Z+20℃</td><td colspan="2">3</td><td colspan="3">8</td></tr></table> (at 120Hz)						Rated Voltage (V)	200~250		400~450			Z-25℃/Z+20℃	3		8								
Rated Voltage (V)	200~250		400~450																					
Z-25℃/Z+20℃	3		8																					
Load Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DCvoltage with the rated rippled current is applied for 5000 hours at 105℃ <table><tr><td>Capacitance change</td><td colspan="5">Within ±20%initial value</td></tr><tr><td>D.F. (Tan δ)</td><td colspan="5">Not more than 200% of specified value</td></tr><tr><td>leakage current</td><td colspan="5">Not more thanspecified value</td></tr></table>						Capacitance change	Within ±20%initial value					D.F. (Tan δ)	Not more than 200% of specified value					leakage current	Not more thanspecified value				
Capacitance change	Within ±20%initial value																							
D.F. (Tan δ)	Not more than 200% of specified value																							
leakage current	Not more thanspecified value																							
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ afterexposing them for 1,000hours at 105℃without voltage applied .Before the measurement , the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4. <table><tr><td>Capacitance change</td><td colspan="5">Within± 20%initial value</td></tr><tr><td>D.F. (Tan δ)</td><td colspan="5">Not more than 200% of specified value</td></tr><tr><td>leakage current</td><td colspan="5">Not more than 200% of specified value</td></tr></table>						Capacitance change	Within± 20%initial value					D.F. (Tan δ)	Not more than 200% of specified value					leakage current	Not more than 200% of specified value				
Capacitance change	Within± 20%initial value																							
D.F. (Tan δ)	Not more than 200% of specified value																							
leakage current	Not more than 200% of specified value																							

◆ DIMENSIONS(mm)

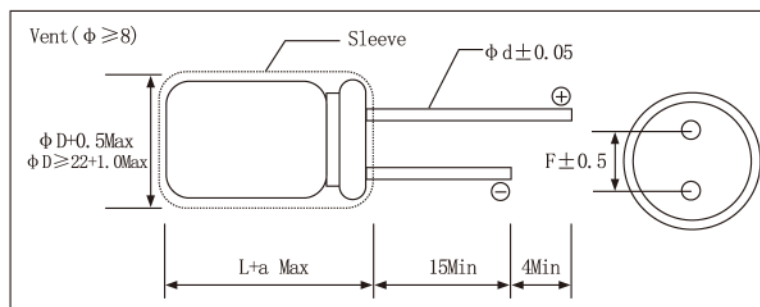

ΦD	10	13	16~18
F	5	5	7.5
Φd	0.6	0.6	0.8
a	2	2	2

◆ Frequency Coefficient

Frequency		50Hz 60Hz	120Hz	1kHz	10kHz	100kHz
Coefficient	200~250V	0.8	1.0	1.20	1.30	1.40
	400~450V	0.8	1.0	1.25	1.40	1.50

◆ Temperature Coefficient

Temperature (°C)	+70	+85	+105
Coefficient	1.80	1.40	1.00



◆ STANDARD RATINGS

UR (Surge Voltage) Code	Rated Capacitance	Max Impedance 20°C 120Hz	Rated Ripple Current 105°C 120Hz	Size Φ D×L
(V)	(μF)	(Ω)	(mA rms)	(mm)
200 (250) 2D	82	2.42	420	10×36
	100	1.99	480	10×40
	120	1.66	540	10×45
	150	1.33	650	13×36
	180	1.10	730	13×42
	220	0.90	840	13×45
	270	0.74	910	16×40
	330	0.60	1050	18×36
	390	0.51	1180	18×40
	470	0.42	1300	18×45
250 (300) 2E	560	0.36	1450	18×50
	68	2.93	340	10×36
	82	2.43	440	10×43
	100	1.99	500	10×51
	120	1.66	580	13×40
	150	1.33	680	13×45
	180	1.11	760	16×40
400 (450) 2G	220	0.91	880	18×40
	33	8.04	290	10×40
	47	5.65	390	10×51
	56	4.74	440	13×40
	68	3.90	500	13×45
	100	2.65	610	16×40
	120	2.21	680	18×36
	150	1.77	810	18×40
	180	1.47	920	18×45
420 (470) W6	220	1.21	960	18×50
	39	6.80	320	10×45
	47	5.65	370	10×51
	56	4.74	450	13×40
	68	3.90	520	13×45
	100	2.65	640	18×32
450 (500) 2W	120	2.21	700	18×36
	150	1.77	840	18×45
	33	8.04	290	10×45
	39	6.80	330	10×51
	47	5.65	330	13×36
	53	5.00	400	13×40
	56	4.74	430	13×45
	68	3.90	460	13×45
	68	3.90	540	13×51
	82	3.24	540	16×36
	82	3.24	600	16×45
	100	2.65	700	18×32

Customer products are available on request