


APPLICATIONS

- High efficiency switch mode power supplies
- Free wheeling diodes.polarity protection application

FEATURES

- Common cathode structure
- Low power loss,high efficiency
- High Operating Junction Temperature.
- Guard ring for overvoltage protection, High reliability
- ROHS product

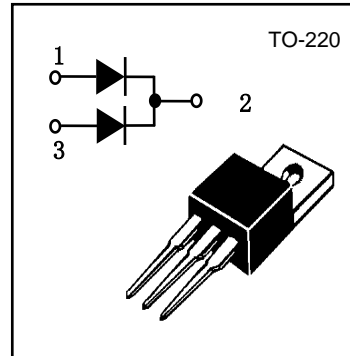

绝对最大额定值 ABSOLUTE RATINGS(Tc=25°C)

项目 Parameter	符号 SYMBOL	数值 Value	单位 UNIT
最大反向重复峰值电压 Repetitive peak reverse voltage	VRRM	150	V
最大直流阻断电压 Maximum DC blocking voltage	VDC	150	V
正向平均整流电流 Average forward current	IF(AV)	20	A
整个器件 per device		10	
正向峰值浪涌电流 Surge non repetitive forward current	IFSM	150	A
最高结温 Maximum junction temperature	TJ	175	°C
存储温度 Storage temperature range	TSTG	-40~+150	°C

电特性 Electronic Characteristics(Tc=25°C)

项目 Parameter	测试条件 Tests conditions		最小值 Value(min)	典型值 Value(typ)	最大值 Value(max)	单位 UNIT
IR	TJ=25°C	VR=VRRM			10	uA
	TJ=125°C				10	mA
VF	TJ=25°C	IF=10A		0.89	0.95	V
	TJ=125°C			0.76	0.85	V

热特性 THERMAL CHARACTERISTICS

项目 Parameter	符号 Symbol	最小值 Value(min)	最大值 Value(max)	单位 Unit
结到管壳的热阻 Thermal resistance from junction to case	Rth(j-c)		3.6	°C/W

特性曲线 ELECTRICAL CHARACTERISTICS (curves)

FIG-1 FORWARD CURRENT DERATING CURVE

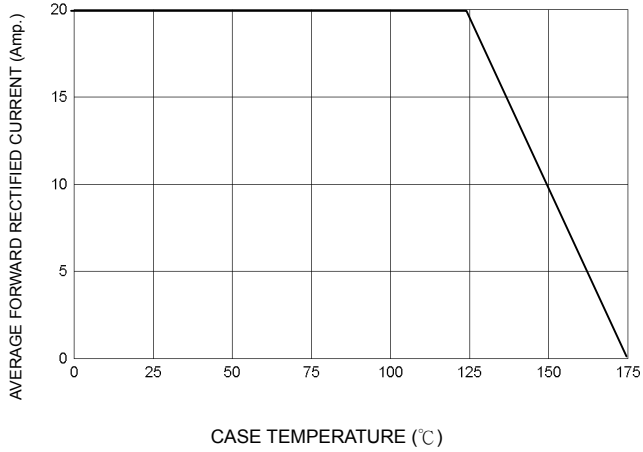


FIG-2 TYPICAL FORWARD CHARACTERISTICS

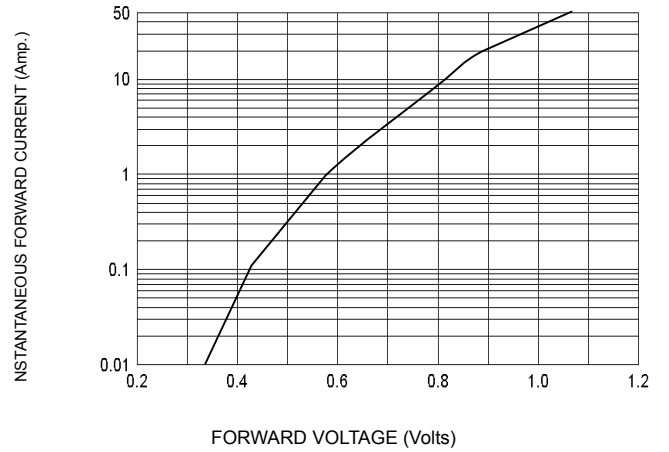


FIG-3 TYPICAL REVERSE CHARACTERISTICS

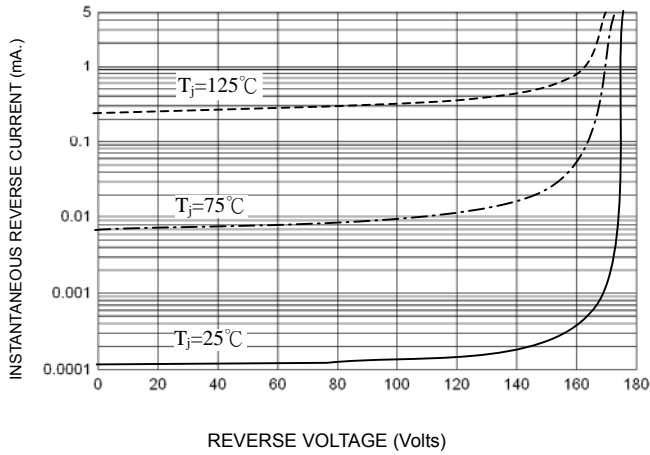


FIG-4 TYPICAL JUNCTION CAPACITANCE

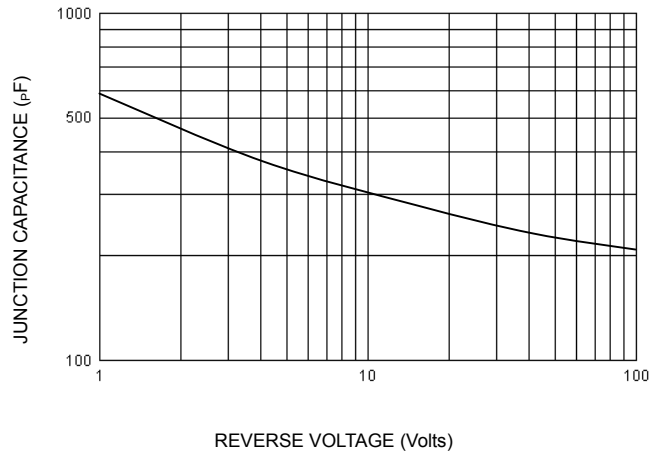


FIG-5 PEAK FORWARD SURGE CURRENT

