



MAIN CHARACTERISTICS

I_D	5A
V_{DSS}	500V
$R_{DS(on)-max}$ (@ $V_{GS}=10V$)	1.5 Ω
Q_G -typ	12nC



FEATURES

- Fast Switching
- Low ON Resistance
- Low Gate Charge
- 100% Single Pulse avalanche energy Test

APPLICATIONS

- Power switch circuit of adaptor and charger.

MECHANICAL DATA

- Case: Molded plastic
- Mounting Position: Any
- Molded Plastic: UL Flammability Classification Rating 94V-0
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Solder bath temperature 275°C maximum, 10s per JESD 22-B106

Maximum Ratings at Tc=25°C unless otherwise specified

Characteristics	Symbol	Value	Unit
		220F	
Drain-Source Voltage	V_{DS}	500	V
Gate-Source Voltage	V_{GS}	± 30	V
Continue Drain Current	I_D	5	A
Pulsed Drain Current (Note1)	I_{DM}	20	A
Power Dissipation	P_D	30	W
Single Pulse Avalanche Energy (Note1)	E_{AS}	250	mJ
Operating Temperature Range	T_J	150	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C
Thermal Resistance, Junction to Case	$R_{\theta JC}$	4.17	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	62.5	°C/W

Note1:Pulse test: 300 μ s pulse width, 2 % duty cycle

Electrical Characteristics at Tc=25°C unless otherwise specified







Characteristics	Test Condition	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	BV_{DSS}	500	-	-	V
Drain-Source Leakage Current	$V_{DS} = 500 \text{ V}, V_{GS} = 0 \text{ V}$	I_{DSS}	-	-	1	μA
Gate Leakage Current	$V_{GS} = \pm 30 \text{ V}, V_{DS} = 0 \text{ V}$	I_{GSS}	-	-	± 100	nA
Gate-Source Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250 \mu\text{A}$	$V_{GS(th)}$	2	-	4	V
Drain-Source On-State Resistance	$V_{GS} = 10 \text{ V}, I_D = 2.5 \text{ A}$	$R_{DS(on)}$	-	-	1.5	Ω
Forward Transconductance	$V_{DS} = 15 \text{ V}, I_D = 2.5 \text{ A}$	g_{fs}	-	4	-	S
Input Capacitance	$V_{GS} = 0 \text{ V}, V_{DS} = 25 \text{ V}, f = 1 \text{ MHz}$	C_{iss}	-	580	-	pF
Output Capacitance		C_{oss}	-	60	-	pF
Reverse Transfer Capacitance		C_{rss}	-	5	-	pF
Turn-on Delay Time(Note2)	$I_D = 5 \text{ A}, V_{DD} = 250 \text{ V}, R_G = 10 \Omega$	$t_{d(ON)}$	-	14	-	ns
Rise Time(Note2)		t_r	-	18	-	ns
Turn-Off Delay Time(Note2)		$t_{d(OFF)}$	-	32	-	ns
Fall Time(Note2)		t_f	-	11	-	ns
Total Gate Charge(Note2)	$I_D = 5 \text{ A}, V_{DD} = 400 \text{ V}, V_{GS} = 10 \text{ V}$	Q_G	-	12	-	nC
Gate to Source Charge(Note2)		Q_{GS}	-	3	-	nC
Gate to Drain Charge(Note2)		Q_{GD}	-	5	-	nC

Source-Drain Diode Characteristics at Ta=25°C unless otherwise specified

Characteristics	Test Condition	Symbol	Min.	Typ.	Max.	Unit
Maximun Body-Diode Continuous Current		I_S	-	-	5	A
Maximun Body-Diode Pulsed		I_{SM}	-	-	20	A
Drain-Source Diode Forward Voltage	$I_{SD} = 5 \text{ A}$	V_{SD}	-	-	1.4	V
Reverse Recovery Time(Note2)	$I_{SD} = 5 \text{ A}, V_{GS} = 0 \text{ V}, dI_F / dt = 100 \text{ A}/\mu\text{s}$	t_{rr}	-	330	-	ns
Reverse Recovery Charge(Note2)		Q_{rr}	-	1.5	-	μC


Note2:Pulse test: 300 μ s pulse width, 2 % duty cycle

RATINGS AND CHARACTERISTIC CURVES

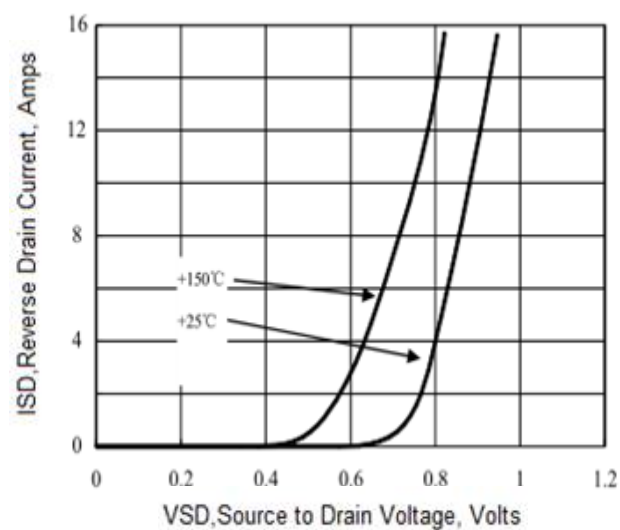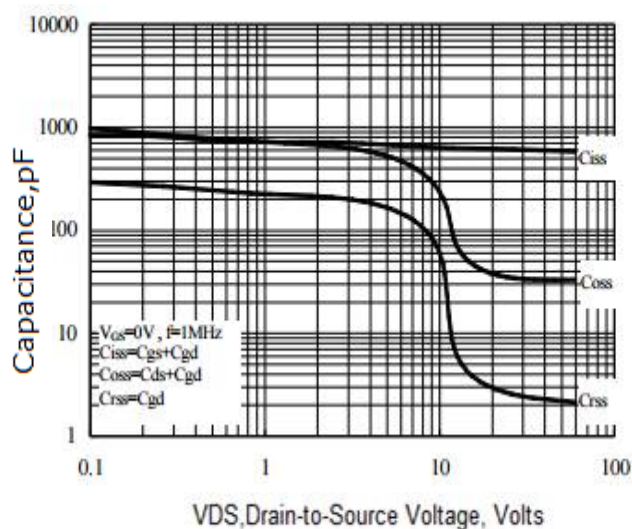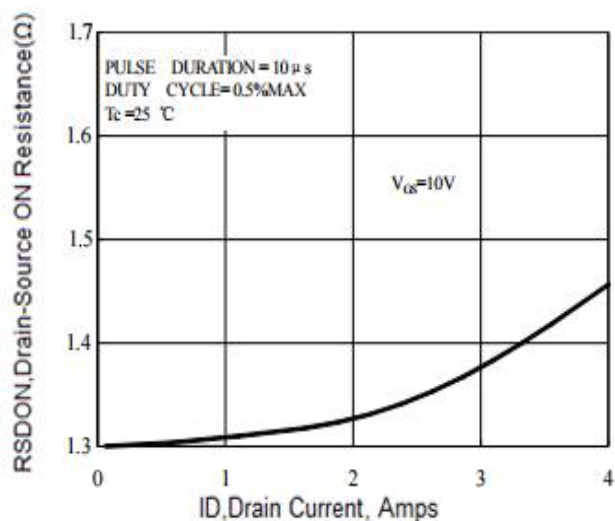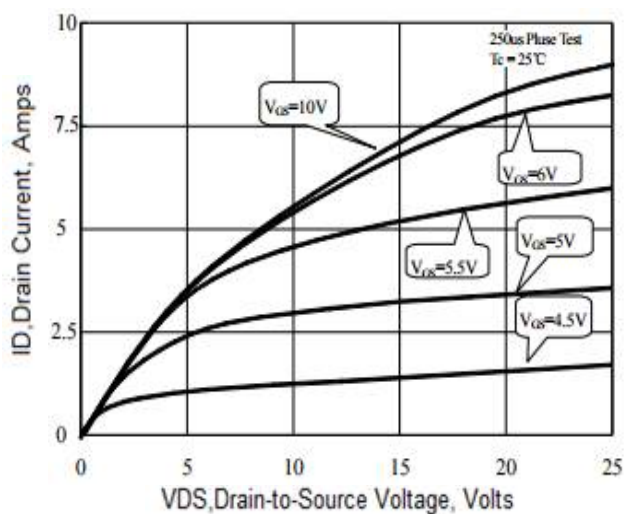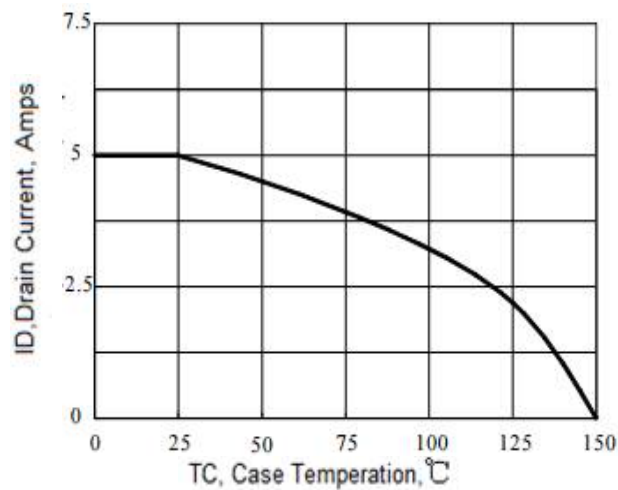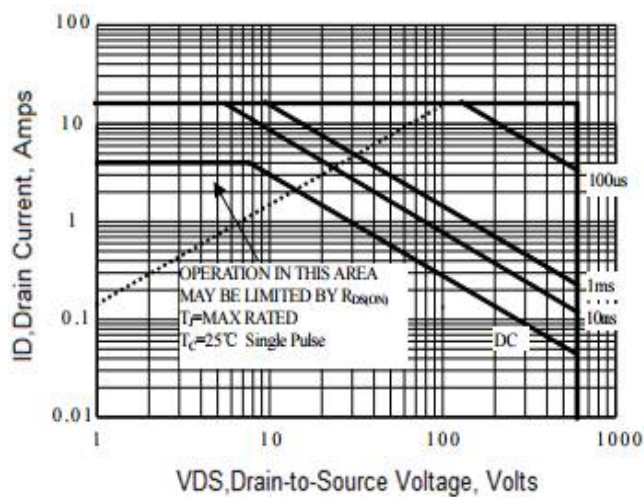

Package Outline Dimensions millimeters

TO-220F

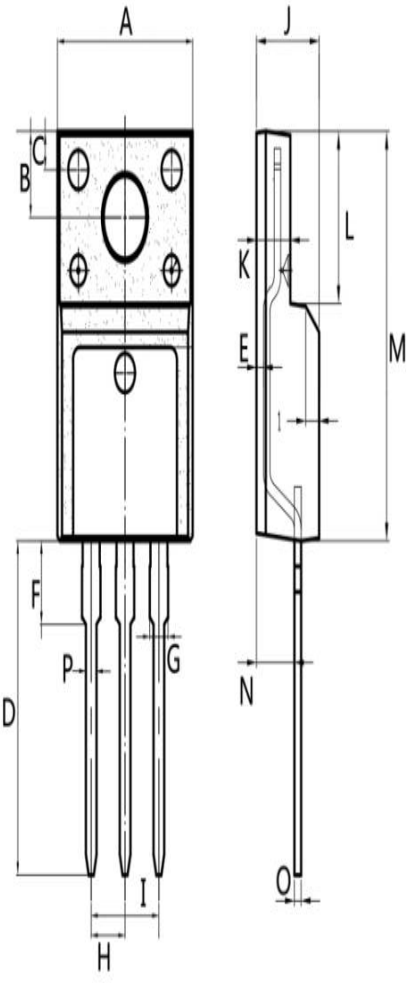	Dim.	Min.	Max.
	A	9.9	10.3
	B	2.9	3.5
	C	1.15	1.45
	D	12.75	13.25
	E	0.55	0.75
	F	3.1	3.5
	G	1.25	1.45
	H	Typ 2.54	
	I	Typ 5.08	
	J	4.55	4.75
	K	2.4	2.7
	L	6.35	6.75
	M	15.0	16.0
	N	2.75	3.15
	O	0.45	0.60
	P	0.7	0.9
	All Dimensions in millimeter		